
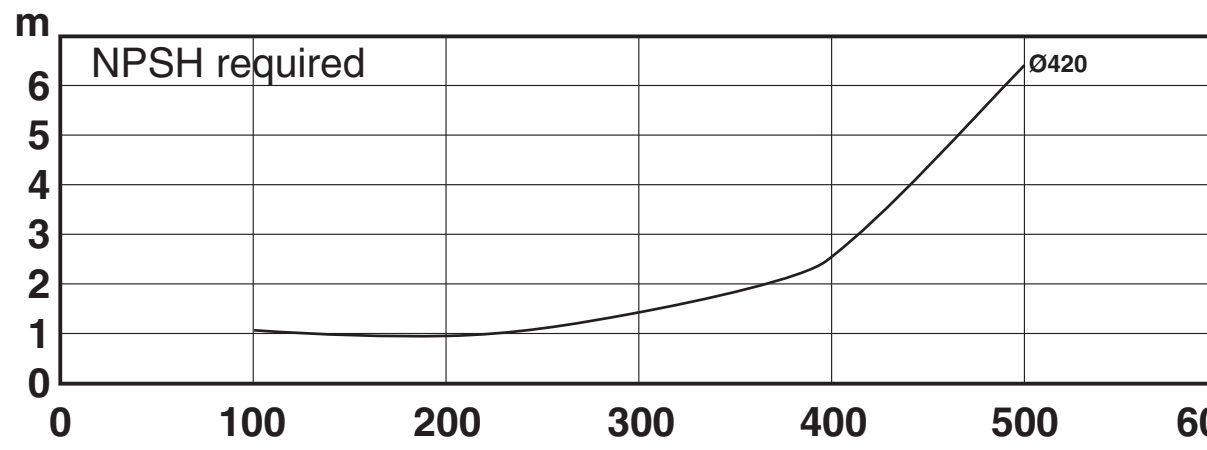
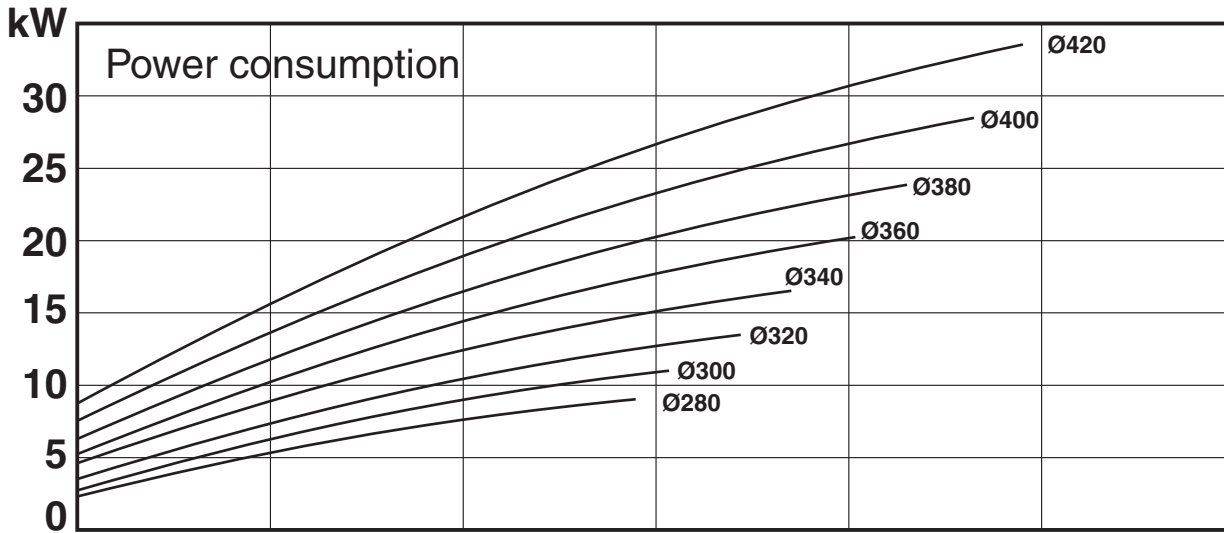


453413 ISS S 10.08

NOTE: _____

Speed: $n = 975^{-1}$ 50 Hz
 Impeller: Max. dia 420 mm
 Min. dia 280 mm
 Pump inlet: DN250
 Pump outlet: DN200

Performance data refer to water at 20°C
 Permissible tolerance $\pm 5\%$



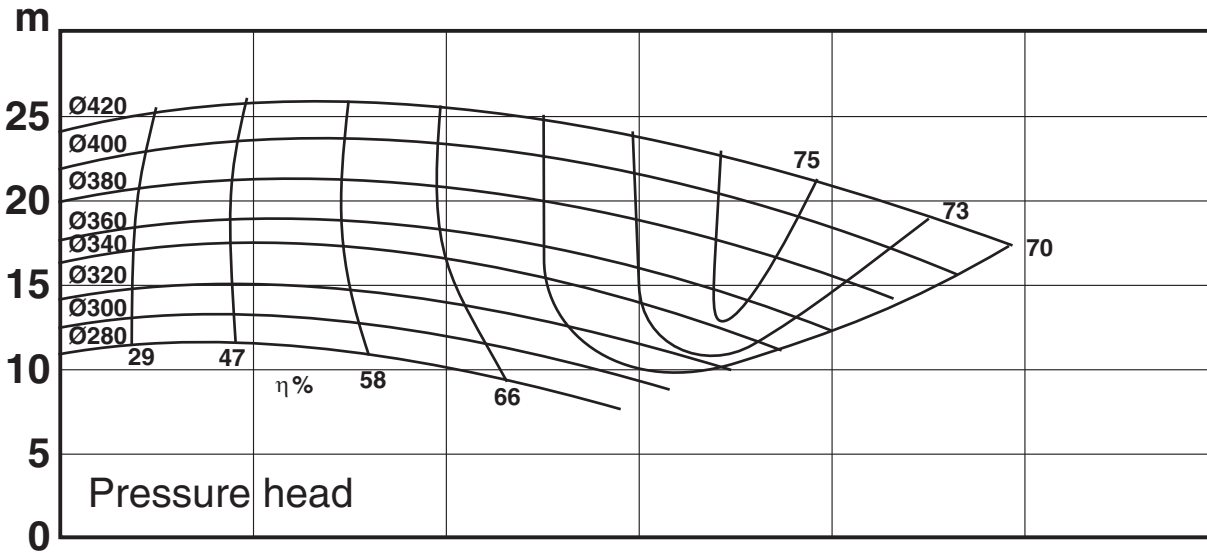


453413 ISS S 10.08

NOTE: _____

Speed: $n = 1450^{-1}$ 50 Hz
 Impeller: Max. dia 420 mm
 Min. dia 280 mm
 Pump inlet: DN250
 Pump outlet: DN200

Performance data refer to water at 20°C
 Permissible tolerance $\pm 5\%$

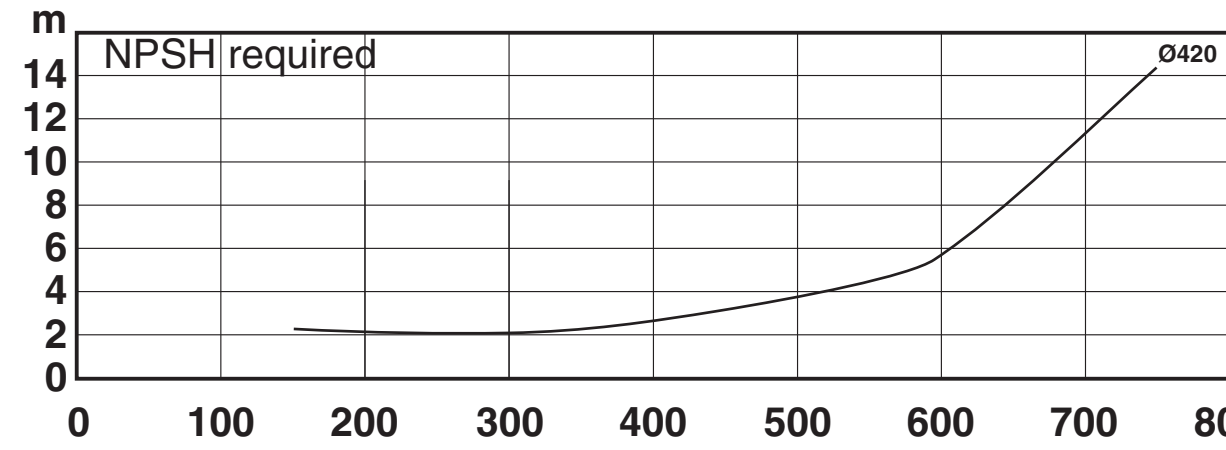
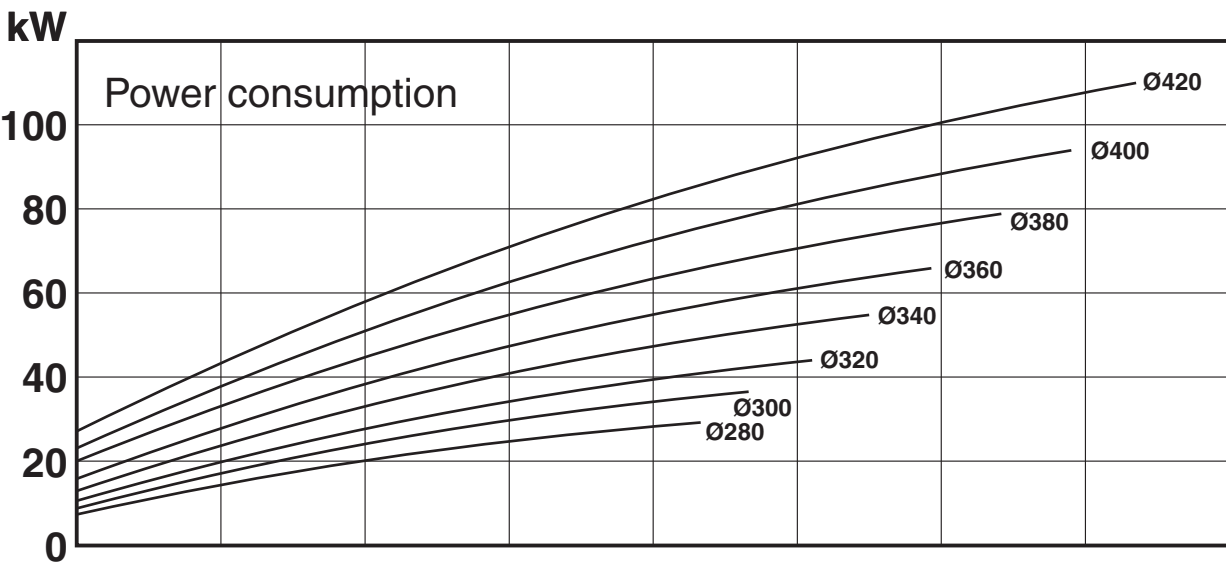
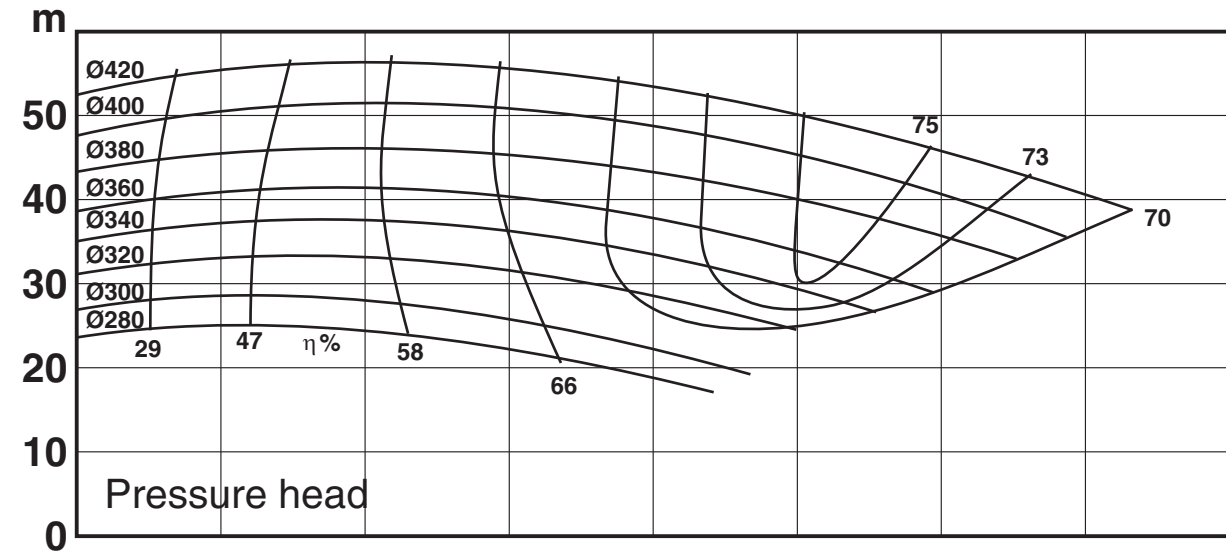


453413 ISS S 10.08

NOTE: _____

Speed: $n = 1200^{-1}$ 60 Hz
 Impeller: Max. dia 420 mm
 Min. dia 280 mm
 Pump inlet: DN250
 Pump outlet: DN200

Performance data refer to water at 20°C
 Permissible tolerance $\pm 5\%$

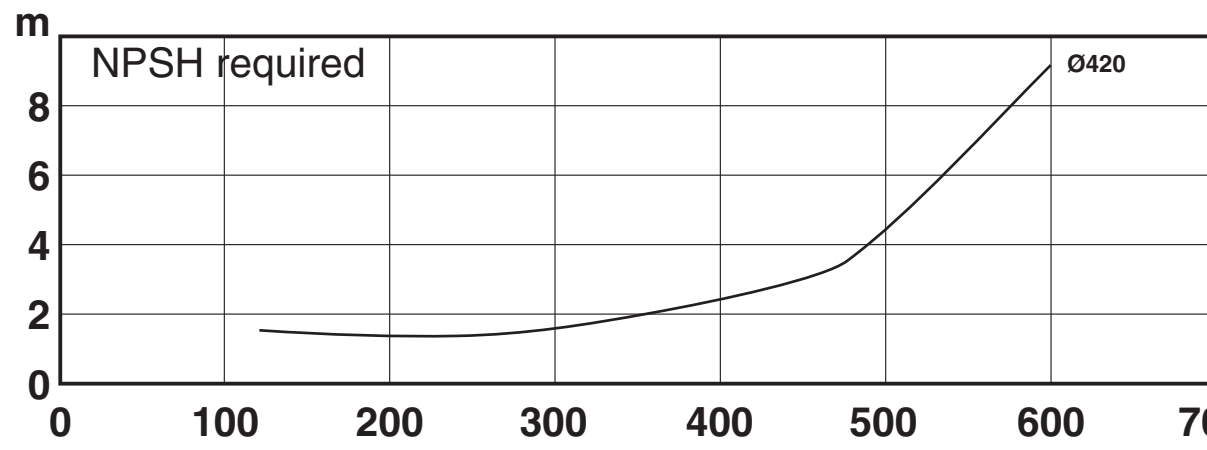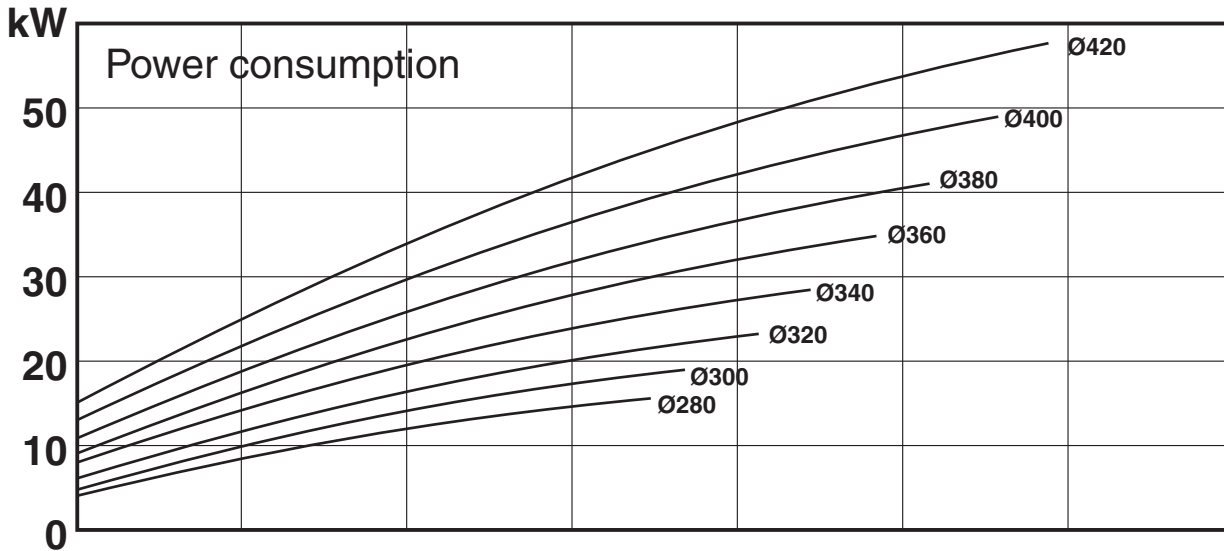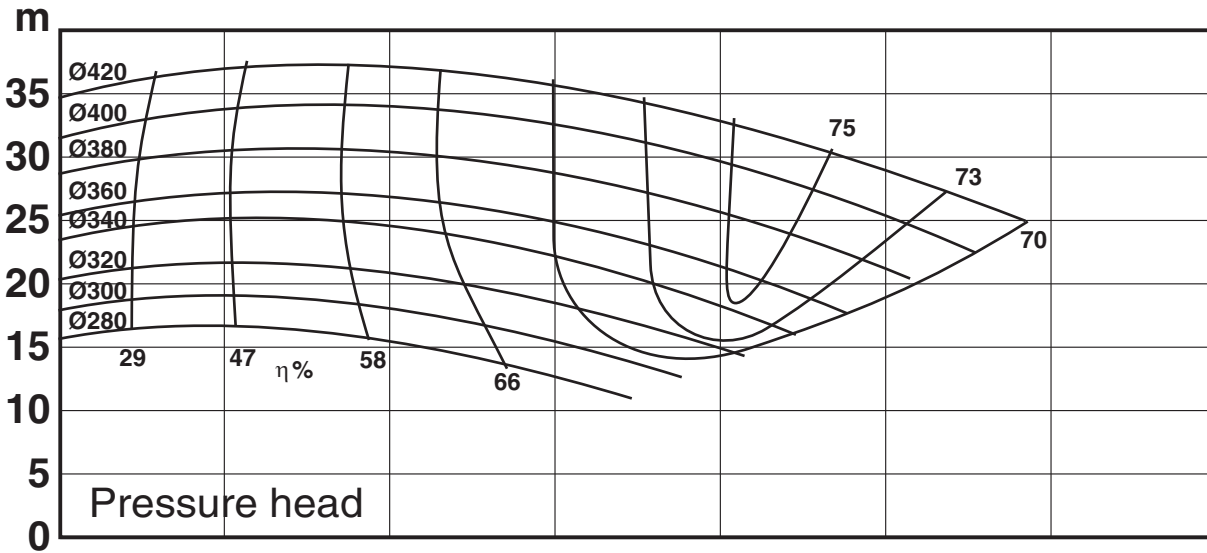

453413 ISS S 10.08

NOTE: _____

Speed: $n = 1750^{-1}$ 60 Hz
 Impeller: Max. dia 420 mm
 Min. dia 280 mm
 Pump inlet: DN250
 Pump outlet: DN200

Performance data refer to water at 20°C
 Permissible tolerance $\pm 5\%$

