

WAUKESHA "C" SERIES CENTRIFUGAL PUMPS

CAPACITY CURVES


Based on water at 70°F. (22°C.)

MODEL: C-218

60 Hz 3500 RPM


SIZE: 2 x 1-1/2 x 8

CUBIC METERS PER HOUR

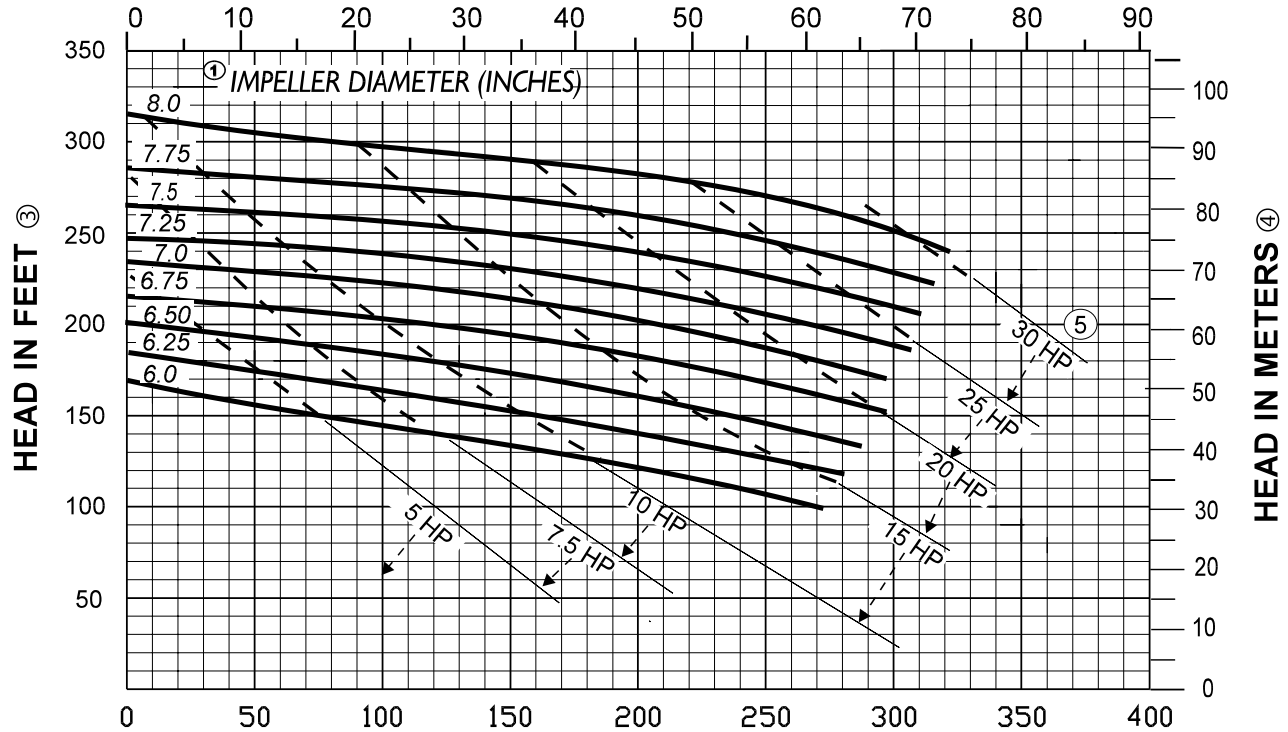

US GALLONS PER MINUTE

CUBIC METERS PER HOUR

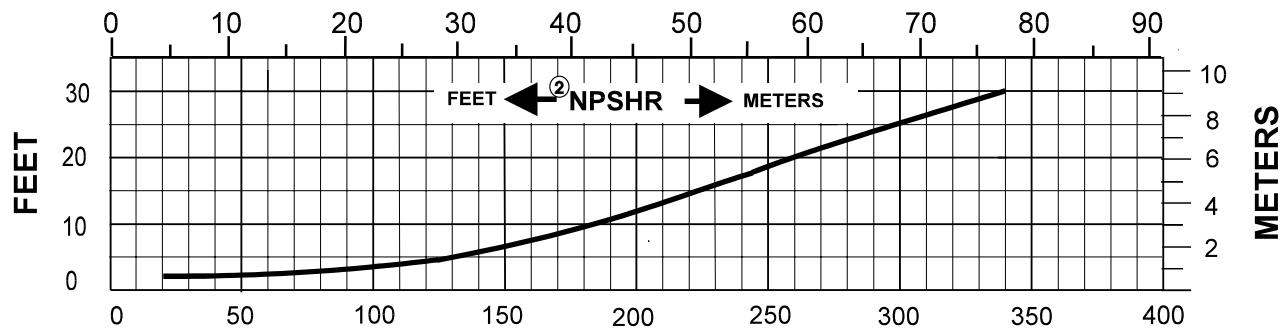

US GALLONS PER MINUTE

NOTES

- ① Impeller diameters available in 1/8-inch increments
- ② NPSHR is shown for maximum impeller diameter

COMMON CONVERSIONS

- ③ $PSI = \frac{\text{Head in Feet} \times \text{Specific Gravity}}{2.3}$
- ④ $Kg/cm^2 = \frac{\text{Head in Meters} \times \text{Specific Gravity}}{10}$
- ⑤ $HP \times 0.746 = Kw$

SPXFLOW

Waukesha
Cherry-Burrell

611 Sugar Creek Road Delavan, WI 53115 | Phone: 800-252-5200 or 262-728-1900

www.spxflow.com/wcb

CURVE NUMBER
95-07059

EFFECTIVE DATE
7-22-2002

PAGE NUMBER
001