


Capacity / WHP / VHP / NIPR

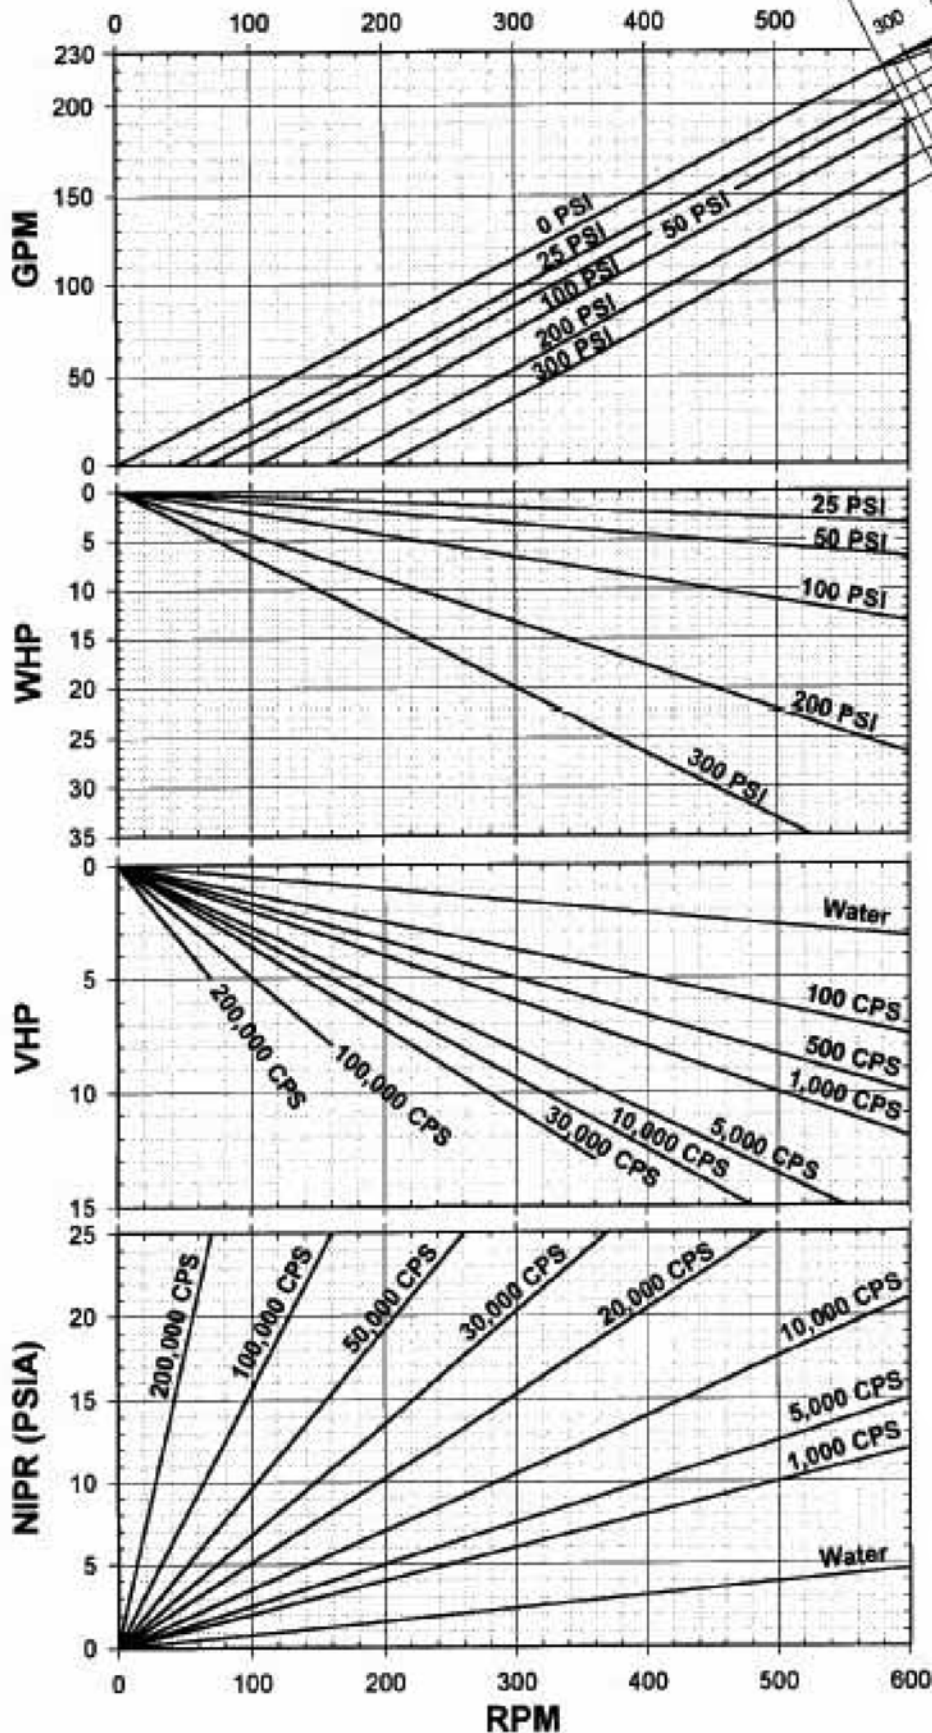

Universal® 2 Rectangular Flange Model

184-U2-RF

Alloy 88 Rotors
 Standard Clearance
 Standard Port Size: 3.0"
 Displacement:
 0.380 gal/rev

BHP = WHP + VHP

SPXFLOW

Waukesha
 Cherry-Burrell

611 Sugar Creek Road
 Delavan, WI 53115 USA
 T: 1-800-252-5200 / 262-728-1900
 F: 1-800-252-5012 / 262-728-4904
 E: wcb@spxflow.com
 www.spxflow.com

Effective date: 01/01/2006

Specifications subject to change
 without notice.

Curve Number
95-07157